


Biosecurity Sanitation System

Requirements:

- 110v20A Outlet
- 1" Pipe 30-40 PSI Inlet Water

Nozzles:

- .35 GPM
- 30 PSI
- 27 Total Nozzles
- 110 Degree Spray Angle

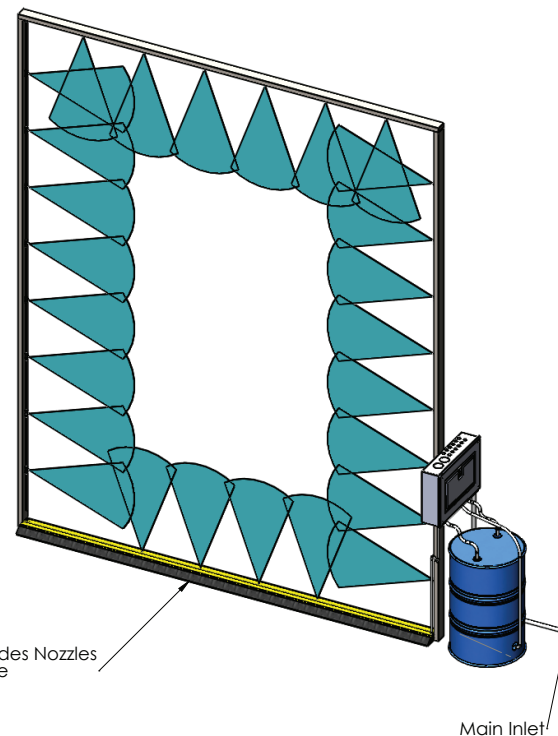

Control System Components

- Sediment and NeutraScale (water softener)
- Water resistant enclosure with outdoor mount
- Adjustable solution injector
- Maintenance free injection system
- Low level solution sensor and indicator light
- Automatic vehicle detection system
- Active operation alarm
- 1 inch NPT inlet connection
- 50 PSI operating pressure (no pump required)

Nozzles

- Flat 110 degree spray pattern provides complete coverage for all size vehicles
- Each nozzle has a 0.35 GPM flow rate
- Minimum 50 PSI operating pressure
- 27 nozzles
- Chemical resistant PVDF nozzles and poly tubing

Spray Frame

- Galvanized steel frame — G90
- Entry speed bump
- 360 degree coverage on the vehicle